

Europäisches Patentamt
European Patent Office
Office européen des brevets



(11) **EP 1 082 907 A2**

(12) **EUROPEAN PATENT APPLICATION**

(43) Date of publication:
14.03.2001 Bulletin 2001/11

(51) Int. Cl.⁷: **A23C 3/033**, A23C 9/152,
A23L 3/3409, A23L 3/18

(21) Application number: **00118250.0**

(22) Date of filing: **04.09.2000**

(84) Designated Contracting States:
**AT BE CH CY DE DK ES FI FR GB GR IE IT LI LU
MC NL PT SE**
Designated Extension States:
AL LT LV MK RO SI

(30) Priority: **09.09.1999 JP 25630099**

(71) Applicant:
**MEIJI MILK PRODUCTS COMPANY LIMITED
Tokyo 104-8381 (JP)**

(72) Inventors:
• **Kamiya, Tetsu,**
Meiji Milk Products Company Ltd.
Isesaki-shi, Gunma-ken 372-0034 (JP)

• **Toyoda, Ikuru**
Higashimurayama-shi, Tokyo, 189-0002 (JP)
• **Inagaki, Hiroki**
Higashimurayama-shi, Tokyo, 189-0003 (JP)
• **Takeuchi, Yukinari**
Higashimurayama-shi, Tokyo, 189-0014 (JP)
• **Kudo, Shunichi**
Iruma-shi, Saitame-ken, 358-0027 (JP)

(74) Representative:
Gille Hrabal Struck Neidlein Prop Roos
Patentanwälte
Brucknerstrasse 20
40593 Düsseldorf (DE)

(54) **A sterilising method by substituting the dissolved oxygen in milk or the like with nitrogen gas, a product thereof and an apparatus for nitrogen gas substitution**

(57) An object of the present invention is to reduce the generation of smell by sterilization and to improve the taste in carrying out the sterilization of milk or the like, and the method of the present invention is a method where sterilization is carried out after the dissolved oxygen in milk or the like is substituted with nitrogen gas, and the method is characterized in that a means in which nitrogen gas is directly mixed with and dispersed in milk or the like and a means in which milk or the like with which nitrogen gas is not mixed is sprayed from a nozzle(s) to the top of milk or the like, with and in which nitrogen gas has been mixed and dispersed, stored in a nitrogen gas substituting tank under a nitrogen gas atmosphere, are jointly used whereby the dissolved oxygen amount in the milk or the like is reduced by means of substitution of the dissolved oxygen with nitrogen gas, followed by subjecting to sterilization.

EP 1 082 907 A2

Description

Field of the Invention

5 [0001] The present invention relates to a method for the sterilization by substituting the dissolved oxygen in milk or the like (defined hereinafter) with nitrogen gas in a sterilization of milk or the like, to a product prepared thereby and to an apparatus for substituting with nitrogen gas.

Prior Art

10 [0002] With regard to a method for removing the dissolved oxygen in liquid, a physical method such as an injection method and a tower flushing method and a chemical method using a deoxidizer have been known.

[0003] In substituting the dissolved oxygen in liquid with gas, a method where the gas which is used for the substitution is directly injected into a tank of the liquid using a pipe or the like followed by mixing to substitute with the gas has
15 been known.

[0004] A gas mixing apparatus in which nitrogen gas and milk or the like are placed in a mixer and stirred whereby oxygen gas is substituted therewith has been known (Japanese Patent No. 2,805,593).

[0005] A method in which the oxygen in milk, unheated solution containing milk, fruit juice, etc. is substituted with gas and the dissolved oxygen amount in the liquid is reduced to carry out the sterilization has been known as well (Japanese Patent Laid-Open Publication No. Hei-10(1998)/295341).
20

Matters to be Solved by the Invention

[0006] In the present invention, the matters to be solved are that, when a sterilization is carried out at high temperature (such as at 130°C for 2 seconds) for making the long preservation of milk or the like possible, sulfides which are
25 the causing substances or the so-called heated smell are generated whereby taste and smell of the beverage is deteriorated.

[0007] Most of the said sulfides are dimethyl sulfide and dimethyl disulfide and, since they greatly deteriorate the taste and the smell of the heat-sterilized product, it has been demanded to suppress the generation of the sulfides in
30 carrying out the sterilization.

[0008] As such, in order to manufacture a product which can be preserved for long period, the sterilizing condition has been necessary to be at 130°C for 2 seconds and there is a problem that, when sterilization is carried out under such a condition, generation of the sulfides is inherently unavoidable.

[0009] Under such circumstances, there has been a demand that, even when sterilization is carried out under such a high temperature condition necessary for preservation for a long period, production of sulfides is suppressed to such
35 a low extent that the taste and the smell are not deteriorated.

[0010] With regard to a means for solving that, a sterilization under the reduction of the dissolved oxygen in the liquid which is to be sterilized is effective and, as one of the methods for reducing the dissolved oxygen in the liquid, substitution of the dissolved oxygen in liquid with an inert nitrogen gas has been carried out.

[0011] As to a method for substituting with nitrogen gas as such, physical and chemical methods have been proposed already but, in the sterilization of milk or the like, all of those methods have a low substituting efficiency and, especially in the case of a mechanical mixing and dispersing of the gas, great volume of foam is accompanied whereby there is a problem that, in order to improve the efficiency, the equipment becomes large in size and the cost becomes
40 high.

[0012] An object of the present invention is to provide a practical method and apparatus of a low cost and without a large device whereby the above-mentioned problem is solved.
45

Brief Explanation of the Drawings

50 [0013]

Fig. 1 is a flow sheet of an example of the present invention.

Fig. 2 is a graph showing the changes with a lapse of time of overall heat transfer coefficient of heating part of the sterilizer of the present invention (an example where substitution with nitrogen gas is not carried out).

55 Fig. 3 is a graph showing the changes with a lapse of time of overall heat transfer coefficient of heating part of the sterilizer of the present invention (an example where substitution with nitrogen gas is carried out).

Fig. 4 is a graph of the result of organoleptic evaluations by means of a pair test according to the present invention.

[0014] The symbols used therein have the following meanings.

1:	Material tank
1a:	Liquid-sending pump
2:	Material
3, 9, 14, 16, 21:	Liquid-sending pipes
5a, 5b, 5c, 5d:	Flowmeters
1b, 6a, 6b:	Flow rate-controlling valves
6c:	Opening/closing valve
7:	Nitrogen gas pipe
8:	Device for supplying the nitrogen gas
8a:	Nitrogen gas tank
10:	Static mixer
11:	Tank for substituting with nitrogen gas
12:	Pressure gauge
13:	Spraying nozzle
15:	Liquid-sending pump equipped with a revolution controller
17:	Plate Sterilizer
18a, 18b:	Check valve
19:	Clarifier
20:	Homogenizer

Means for Solving the Matters

[0015] In order to solve the above-mentioned problems, the inventors of the present invention have carried out a study and have found that, in a method for sterilization where dissolved oxygen in milk or the like is substituted with nitrogen gas, when (1) a means in which nitrogen gas is directly mixed with and dispersed in milk or the like and (2) a means in which milk or the like of the same material with which nitrogen gas is not mixed is sprayed from a nozzle(s) to the top of milk or the like with and in which nitrogen gas has been mixed and dispersed by the means in the above (1), stored in a nitrogen gas substituting tank under a nitrogen gas atmosphere so that substitution with nitrogen gas and defoaming are effected, are jointly used whereby the dissolved oxygen amount in the milk or the like is reduced by means of substitution of the dissolved oxygen with nitrogen gas and then the resultant milk or the like is subjected to sterilization, generation of sulfides can be suppressed to a low degree and the above problems can be solved.

[0016] In accordance with the present invention, the above-mentioned problems can be solved at a low cost and without a large equipment which have not been achieved in the prior art.

[0017] In the present invention, when milk or the like is sterilized by substituting the dissolved oxygen which is a highly foaming liquid with nitrogen gas, the protein and the saccharide contained in the liquid contribute to generation of foams and, therefore, it is an important matter to treat with suppressing the foaming. Thus, since milk or the like produces excessive foams during its treatment, there are several problems that foamed liquid overflows from a storing tank, that fouling in a sterilizer is enhanced by an entrainment of many fine foams and accordingly that sterilizing function and efficiency are reduced, pressure in a homogenizer during the homogenizing step unstably varies and non-uniformity of filled amount during the filling is resulted. In order to solve such problems, there is a necessity of preparing a large tank or another tank for allowing the milk to hold and, because of preparation of new tanks and setting of time for allowing to hold for defoaming, elongation of the treating time and increase in the treating cost are resulted.

[0018] Thus, in order to avoid such problems, it is necessary that, during the treating process, generation of foams is suppressed as much as possible so that substitution of the dissolved oxygen in the liquid with nitrogen gas can be efficiently carried out.

[0019] The method according to the present invention relates to a method where sterilization is carried out after the dissolved oxygen in milk or the like is substituted with nitrogen gas. Practically, the method is characterized in that a means in which nitrogen gas is directly mixed with and dispersed in milk or the like and a means in which milk or the like with which nitrogen gas is not mixed is sprayed from at least one nozzle to the top of milk or the like, with and in which nitrogen gas has been mixed and dispersed by the former means, stored in a nitrogen gas substituting tank under a nitrogen gas atmosphere, are jointly used whereby the dissolved oxygen amount in the milk or the like is reduced by means of substitution of the dissolved oxygen with nitrogen gas, followed by subjecting to sterilization. The method according to the present invention is also the method for sterilization where dissolved oxygen in milk or the like is substituted with nitrogen gas according to the above, wherein sterilization is carried out by making the dissolved oxygen amount in milk or the like 2 ppm or less. The method of the present invention also relates to sterilization where dissolved oxygen in milk or the like is substituted with nitrogen gas according to the above, wherein the means for mixing and dis-

persing of the nitrogen is a static mixer. It also relates to a product of milk or the like which is manufactured by a sterilizing method mentioned in any of the above methods. Further, the present invention relates to that, in an apparatus for substituting the dissolved oxygen in milk or the like with nitrogen gas, a substituting apparatus for milk or the like with nitrogen gas which is characterized in that a nitrogen gas substituting tank connected to a material tank by a liquid-sending pipe is installed, a nitrogen gas supplying device is connected to the said liquid-sending pipe at the side of the material tank while a nitrogen gas mixing/dispersing device is installed at the side of the above nitrogen gas substituting tank, another end of the branched liquid-sending pipe connected to the upstream side from the nitrogen gas-supplying device of the liquid-sending pipe is introduced into a nitrogen gas-substituting tank, a spraying nozzle is connected to the said part and each of the above liquid-sending pipes, nitrogen gas supplying device and a connecting branched pipe is equipped with a flow rate controlling device. Furthermore, the present invention relates to the substituting apparatus for milk or the like with nitrogen gas according to the above, wherein the mixing/dispersing device for the nitrogen gas is a static mixer and, still further, the present invention relates to the substituting apparatus for milk or the like with nitrogen gas according to the above, wherein the flow rate controlling device is a flow rate controlling valve.

[0020] Relation between the dissolved oxygen amount in milk or the like and the taste after sterilization was mentioned in detail in the Japanese Patent Laid-Open Publication No. Hei-10(1998)/295341 which was filed by the present inventors and it was reported that certain difference was noted when the dissolved oxygen amount was 5 ppm while, when it was 1 ppm, a significant difference was noted. Further study has been carried out intensively for the dissolved oxygen amount showing a significant difference as compared with the common heating by referring to the above results and it has been also found that, when it is 2 ppm or less, the effect of substitution with nitrogen gas has been clearly achieved.

Best Mode for Carrying Out the Invention

[0021] The present invention relates to a method for the sterilization in such a state that the dissolved oxygen in milk or the like is substituted with nitrogen gas to make the dissolved oxygen amount low and also relates to an apparatus for carrying out the nitrogen gas substitution therefor efficiently and to a beverage such as milk which is manufactured by the sterilizing method of the present invention.

[0022] It goes without saying that the method for the sterilization in such a state that the dissolved oxygen in milk or the like is substituted with nitrogen gas to make the dissolved oxygen amount low in accordance with the present invention is applicable to other beverages which contain protein and saccharide and have a property of an excessive foaming due to mixing and dispersing with gas in a substituting process with nitrogen gas, such as processed milk, milk beverage, reconstituted milk, fermented milk, beverage containing lactic acid bacteria, fresh cream and fruit juice beverage. In the present invention, a means where the nitrogen gas is directly mixed with and dispersed in milk or the like and another means where it is sprayed into a tank in a nitrogen atmosphere to substitute with nitrogen gas are jointly used whereby advantageous effect in each of those means results in synergism to give a desired effect. In addition, since in the method of the present invention, nitrogen gas substituting and a rapid defoaming of the foams containing nitrogen gas, etc. are carried out by spraying the same material containing no nitrogen gas, there is no disadvantage of being diluted with other material(s) or being necessary to use a device for removing the other material(s) whereby the process is simplified and efficient.

[0023] In the case of milk, the dissolved oxygen amount before the substitution with the gas is about 10 ppm and, in order to lower the dissolved oxygen amount to an extent of 2 ppm by means of substituting with nitrogen gas, about 40-50% of nitrogen gas to the amount of milk by volume is necessary in the method of the present invention.

[0024] Now, in order to check the difference in the method of the present invention where a means in which nitrogen gas is directly mixed with and dispersed in milk or the like and a means in which dissolved oxygen in milk or the like is substituted by spraying in a nitrogen gas substituting tank under a nitrogen gas atmosphere are jointly used and in the case where each of the means constituting the present invention is carried out solely, the effect of the latter is shown as Comparative Test Examples 1 and 2.

Comparative Test Example 1.

[0025] Nitrogen gas was mechanically mixed with and dispersed in milk (raw milk) containing about 10 ppm of dissolved oxygen using a cascade pump and foams of the nitrogen gas were made fine whereby the dissolved oxygen in the milk was substituted with nitrogen gas. To 150 liters/hour of the flow rate of the milk, nitrogen gas of 30% (45 liters/hour) by volume was mixed and dispersed and the dissolved oxygen amount of the milk was able to be made 2 ppm or less. However, according to this method, foaming of the milk substituted with nitrogen gas was too much and, when the milk after the nitrogen gas substituting treatment was placed in a 500-ml beaker, about one-third thereof was foams. When this nitrogen gas-substituted milk was directly sent to the next homogenizing and sterilizing steps, there were various problems such as variation in homogenizing pressure, increase in fouling of sterilizer, occurrence of natural foam-

ing in the storing tank and elongation of holding time. Accordingly, this method may be evaluated to be that which is unable to be practically used.

Comparative Test Example 2.

5

[0026] Reconstituted skim milk containing about 10 ppm of dissolved oxygen was subjected to a nitrogen gas substitution by a method of spraying of all of the said reconstituted skim milk (concentration of the milk solid was about 8%) at a flow rate of 900 liters/hour from a spraying nozzle into a nitrogen gas substituting tank in a nitrogen gas atmosphere having a diameter of 690 mm x 900 mm (volume was about 340 liters). In that case, nitrogen gas was introduced so as to keep the gas phase oxygen concentration about 1.0% by volume in the nitrogen gas substituting tank whereupon the dissolved oxygen concentration became 2 ppm or less. Although the resulting reconstituted skim milk after being substituted with nitrogen gas was foamed, generated amount of the foams was little as compared with Comparative Test Example 1 where nitrogen gas is directly mixed with and dispersed in milk and, when the gas-substituted reconstituted skim milk is held, it was possible to separate the fine foams to such an extent that the next sterilizing step was not affected. In this method however, the gas substituting efficiency is low due to a spraying using a spraying nozzle and the amount which is sprayed within a short period is small. Therefore, when it is practically used, it is necessary to set up many nozzles and to make the size of the nitrogen gas substituting tank large whereby the equipment cost becomes high. Accordingly, this method may be evaluated to be that which is unable to be practically used.

Example 1.

[0027] Now, the present invention will be illustrated by referring to the flow sheet of Fig. 1.

[0028] Milk containing about 10 ppm of dissolved oxygen was sent from a material tank (1) via a liquid-sending pipe (3) while nitrogen gas was injected in the milk in the liquid-sending pipe (3) via a nitrogen gas pipe (7) located before a static mixer (10). After that, the nitrogen gas injected in the milk was mixed and dispersed uniformly using the static mixer (10) attached to the liquid-sending pipe (3) so that the dissolved oxygen in the milk was substituted with the nitrogen gas and then the mixture was transferred to a nitrogen gas substituting tank (11) using a liquid-sending pipe (3).

[0029] The milk in which the nitrogen gas was mixed and dispersed was supplied to a nitrogen gas substituting tank (11) of 690 mm diameter x 900 mm under the condition of flow rate of 1,000 liters/hour and nitrogen gas amount of 8.2 liters/minute (49% by volume) and flowed down from the liquid-sending pipe (3) in a form of thin film.

[0030] In order to maintain the nitrogen atmosphere in the nitrogen gas substituting tank (11), it is necessary that, immediately after the initiation of the operation, nitrogen gas is continuously supplied into a nitrogen gas substituting tank (11). However, in the meanwhile, a direct injection into the milk takes place from the nitrogen gas pipe (7) and the nitrogen gas used for the nitrogen gas substitution for the dissolved oxygen in milk was released into the nitrogen gas substituting tank (11) due to the breakage of the foams and the inner area of the tank was made in a nitrogen gas atmosphere. Accordingly, even when the supply of the nitrogen gas into the tank was ceased, concentration of oxygen of a gaseous phase was kept at about 2.0% by volume during the operation of the apparatus.

[0031] On the other hand, the milk which was not mixed and dispersed with nitrogen gas was sprayed into a nitrogen gas substituting tank (11) in a nitrogen atmosphere using spraying nozzles (13) so that the nitrogen gas substitution of the sprayed drops was carried out and, at the same time, foams which were generated therein were extinguished.

[0032] Incidentally, a device of mixing and dispersing the nitrogen gas using a static mixer (10) and a device of spraying from the spraying nozzles were carried out at the same time in parallel.

[0033] With regard to the spraying amount of the milk from the nozzles (13), it was made 330 liters/hour (about one-third of the total flow rate) using four spraying nozzles (13) and the spraying pressure was made 0.3-0.4 bar.

[0034] When substitution with nitrogen gas was carried out under the above conditions, the dissolved oxygen concentration in the milk became 1.98 ppm whereby an object of "2 ppm or less" was able to be achieved. In addition, with regard to the foams in the nitrogen gas substituting tank (11), they were broken or their growth was suppressed by the sprayed drops which were sprayed out from the spraying nozzles (13) whereupon the both effects of nitrogen gas substitution and defoaming were resulted. The fine foams in the nitrogen gas substituting tank (11) were held for about 5 minutes in the nitrogen gas substituting tank (11) whereby they were able to be removed to such an extent that they did not badly affect the next steps such as homogenization and sterilization. The milk which was substituted with nitrogen gas was sent in a direction of an arrow (14a) by driving the revolution-controlled liquid sending pump (15) by a liquid sending pipe (14) installed at the bottom of the nitrogen gas substituting tank (11), preheated at 80-90°C by a plate sterilizer (17), homogenized by a homogenizer (20), then sent to a plate sterilizer (17) again to sterilize at 130°C for 2 seconds and filled in containers using a filling machine (not shown) to give a product.

Example 2.

[0035] The same nitrogen gas substitution as in Example 1 was carried out except that milk containing about 10 ppm of the dissolved oxygen was used and the flow rate was made 12,000 liters/hour using a 2,000-liter nitrogen gas substituting tank (11).

[0036] The result was that, when 40% by volume of nitrogen gas to the milk were injected and the concentration of oxygen of a gaseous phase in the nitrogen gas substituting tank (11) was 4.0% by volume or less, then amount of the dissolved oxygen in the milk became 1.98 ppm which was "2 ppm or less". Further, when about 6% of the prepared material milk which was not subjected to a nitrogen gas substitution was sprayed, growth of the foams in the nitrogen gas substituting tank (11) was able to be suppressed. Furthermore, when the milk which was subjected to a nitrogen gas substitution was held for 3 minutes in the nitrogen gas substituting tank (11), entrainment of fine foams in the outlet of the nitrogen gas substituting tank (11) was able to be prevented.

[0037] The milk which was subjected to a nitrogen gas substitution as per the above method was supplied (10,000 liters/hour) to a sterilizer, pre-heated and held at 80-90°C, homogenized and sterilized at 130°C for 2 seconds. In order to confirm the degree of separation of fine foams from the milk substituted with nitrogen gas, the overall heat transfer coefficients at the three parts of the sterilizer were measured and their changes with a lapse of time were checked. The result is given in Fig. 2 and Fig. 3. Fig. 2 is a control and is an example where no nitrogen gas substitution was carried out.

[0038] In Fig. 3, an example where a nitrogen gas substitution was carried out is shown.

[0039] It is apparent when Fig. 2 and Fig. 3 are compared that, in Fig. 3, the overall heat transfer coefficients at the three heated parts in the during the continuous operation for about 6 hours were nearly same as those in the case of Fig. 2 where no nitrogen gas substitution was carried out and that the tendency of decrease in the heat transfer coefficient with a lapse of time was nearly the same. Accordingly, in the nitrogen gas substitution in the previous step, the fine foams were separated so as not to disturb the operation of the sterilizer.

[0040] In addition, there was neither foaming in the preheating and holding tank nor change in the pressure in the homogenizer and it was possible to operate all of the steps in a very stable condition.

[0041] After the above-mentioned substitution with nitrogen gas, evaluations of the sterilized milk by an organoleptic test and by a physico-chemical analysis were carried out. Evaluating methods and the results thereof are as follows.

1. Evaluating Method by Organoleptic Test.

[0042] A duo-trio test. Any of samples was submitted as a control and then two kinds of samples were submitted whereby the panelist was asked to choose a sample which was believed to be same as the control.

[0043] When this test was carried out by 30 panelists and 20 or more answered correctly, it was evaluated that there was a significant difference between the two samples.

[0044] A pair test. Sweetness, fragrance, etc. were compared between the samples using a seven-step yardstick from -3 to +3. Incidentally, the result used the data of the only panelists who answered correctly in the duo-trio test.

Results:

[0045] A duo-trio test. Correct answer was given by 23 panelists among 30. Therefore, there was a significant difference between the two samples.

[0046] A pair-test. The result is shown in the following Table 1. Table 1 is a result of evaluation of an organoleptic test for the milk which was substituted with nitrogen gas.

Table 1 (Pair Test)

	Milk Flavor	Sweetness	Fattiness	Smoothness	Freshness	Throat-through feeling	After-Taste	Overall Evaluation
Control	0	0	0	0	0	0	0	0
Nitrogen Gas Substituted Milk	0.22	-0.74	-0.98	0.15	0.18	0.45	0.98	0.18

[0047] The result of Table 1 shown by a graph is given in Fig. 4.

[0048] As a result of a duo-trio test, it was confirmed that there was a significant difference between the nitrogen gas-substituted and sterilized milk and the conventionally sterilized milk (control) and that, as compared with the control, the nitrogen gas-substituted and sterilized products showed particular excellence in terms of after-taste and throat-through feeling and excellence in terms of milky flavor, freshness and smoothness as well. Accordingly, it was clarified by a pair test that the product of the present invention was superior as a whole.

2. Evaluating Method by Physico-Chemical Analysis.

[0049] Dimethyl sulfide and dimethyl disulfide which were the representative substances for the resulting heat smell when sterilized at 130°C for 2 seconds were measured by means of a GC/MS (a head space method) and compared. The result is shown in the following Table 2.

Table 2

(Comparative Analysis with Milk Substituted with Nitrogen Gas)			
	Raw Milk	Sterilization after Substituting with Nitrogen	Conventional Sterilization
Dimethyl Sulfide	393×10^3	583×10^3	820×10^3
Dimethyl Disulfide	-	28×10^3	48×10^3

[0050] In the milk which was substituted with nitrogen gas, generation of dimethyl sulfide and dimethyl disulfide was reduced as compared with the conventionally sterilized milk and that supports the result of the organoleptic test.

[0051] As such, in accordance with the method of the present invention, even when milk was sterilized at 130°C for 2 seconds, the test result for the taste showed that the taste was the same as that when sterilization was done at 10-15°C lower temperature than the actual sterilizing temperature (thus, production of sulfides was less) whereby the taste was able to be improved. In addition, production of foams and entrainment of a sterilizer were prevented whereby a stable sterilizing operation was able to be carried out continuously.

[0052] Incidentally, in this example, the milk which was substituted with nitrogen gas was held in a tank for 3 minutes (600 liters) and, since it is possible to separate the fine foams to such an extent that the next step is not badly affected when held for 2 minutes (400 liters) or more, it is believed that, in the manufacture, a tank in smaller size than a 2,000-liter tank is sufficient in the case of treatment at 12,000 liters/hour.

Example 3.

[0053] This is an apparatus for substitution of milk or the like with nitrogen gas in which a nitrogen gas substituting tank (11) connected by a material tank (1) and a liquid-sending pipe (3) is installed; a nitrogen gas pipe (7), a nitrogen gas tank (8a) and a flowmeter (5c) are connected at the side of the material tank (1) as a device for supplying the nitrogen gas; a nitrogen gas mixing/dispersing device (10) is located at the side of the above nitrogen gas substituting tank; other end of a branched liquid-sending pipe (9) which is connected to the upstream side front the nitrogen gas pipe (7) of the nitrogen gas supplying device (8) of the liquid-sending pipe (3) is introduced into a nitrogen gas substituting tank; spraying nozzles (13) are installed at the said part; and each of the above liquid-sending pipes (3, 9) and the nitrogen gas pipe (7) are equipped with flow rate control valves (1b, 6a, 6b) and check valves (18a, 18b).

[0054] Now the operation of this apparatus will be explained as follows.

[0055] The material (2) was transferred from a material tank (1) by a liquid-sending pump (1a) passing through a clarifier (19) to a nitrogen gas substituting tank (11) by a liquid-sending pipe (3). The material (2) was sent in a direction as shown by an arrow (4) while the flow rate in the liquid-sending pipe (3) was measured by a flowmeter (5a) and, based upon the result thereof, the flow rate was adjusted to a predetermined one by means of a flow rate control valve (1b). Then nitrogen gas was sent into a liquid-sending pipe (3) by a nitrogen gas supplying device (8) connected to a liquid-sending pipe (3). The amount of nitrogen gas which was sent thereto was measured by a flowmeter (5c) and, based upon the measured result, the supplying amount of the nitrogen gas was controlled to a predetermined amount by a flow rate control valve (6b). After that, the nitrogen gas sent into the liquid-sending pipe (3) was directly mixed and dispersed with the material (2) by a static mixer (10) which was connected to the liquid-sending pipe (3) and the mixture was immediately sent to a nitrogen gas substituting tank (11) as it was and then stored in a nitrogen gas substituting tank (11).

[0056] After that, a material which was not mixed with nitrogen gas was sprayed from the upper part of the material which was mixed and dispersed with nitrogen gas stored in the nitrogen gas substituting tank (11) in a nitrogen gas atmosphere by spraying nozzles (13) installed at the upper opening of the nitrogen gas substituting tank (10) by a branched liquid-sending pipe (9). The stored material was mixed and dispersed with nitrogen gas by a static mixer (10) whereby it was in a foamed state.

[0057] The material substituted with nitrogen gas was stored in a nitrogen gas substituting tank (11) and the material surface was in such a state that many small and big foams were floated thereon. The material in which nitrogen gas was mixed and dispersed was continuously sent from a liquid-sending pipe (3) whereby foams of nitrogen gas were subjected to a natural breaking and nitrogen gas carried by the foams was released and, therefore, a nitrogen atmosphere was available.

[0058] When spraying was carried out from spraying nozzles (13) onto the foams stored in a nitrogen gas substituting tank (11) in a nitrogen atmosphere, sprayed drops were resulted whereby a nitrogen gas substitution took place and the sprayed drops fell and collided to the foams whereupon the simultaneously foamed foams were broken to defoam. Thus, in the sprayed material, nitrogen was not injected thereinto and, therefore, it became sprayed drops and collided to the foams to break the foams whereupon the defoaming function was well achieved. In addition, nitrogen gas foams which was excessively injected floated on the liquid surface and, with a lapse of time, the foams were naturally broken and nitrogen gas and oxygen or air carried in the foams or in the material were released in a nitrogen gas substituting tank (11) resulting in a condition of nitrogen atmosphere in the nitrogen gas substituting tank. The opening/closing valve (6c) was kept open during the operation of this apparatus while it was closed when the operation was stopped.

[0059] As such, the foams generated by a substitution with nitrogen gas did not overflow from the nitrogen gas substituting tank (11) but were quickly defoamed by both means of natural breakage and destruction by collision of sprayed drops whereby, when the material stored at the lower part of the nitrogen gas substituting tank (11) was sent to the next step, that did not badly affect the next step.

[0060] Incidentally, degree of foaming and defoaming of the material sprayed out from the spraying nozzles (13) varied depending upon the nature of the material and, therefore, amount of the material was to be appropriately adjusted so that it did not affect the treatment in the next step.

[0061] The nitrogen gas substituting tank (11) also had a function as a holding tank for the material wherein nitrogen gas was mixed and dispersed by the static mixer (10) and, therefore, the size of the tank was to be considered in connection with the degree of capability of the sterilizing treatment in the next step. Thus, the surface of the stored liquid was covered by the foamed foams. Due to destruction by sprayed drops and with a lapse of time, the foams were naturally and gradually broken. Accordingly, it was necessary to set and select the holding volume in such a manner that retention time necessary for breakage of the foams was secured until no bad affection to the next sterilizing step was resulted by a progress of destruction of the foams with a lapse of time.

[0062] As such, it was necessary to conduct the operation after adjusting the mutual conditions for injection amount of the nitrogen gas, amount of the liquid sent to the liquid-sending pipe, numbers of element of the static mixer (10), size of holes of the spraying nozzles (13), numbers of the spraying nozzles (13), holding capacity of the nitrogen gas substituting tank (11), etc. depending upon the nature of the product (2).

[0063] When the foams were broken and disappeared until such an extent that no bad affection will be resulted in the next step, a revolution controlled liquid-sending pump (15) was driven by a liquid-sending pipe (14) installed at the bottom of the nitrogen gas substituting tank (11) and the material substituted with nitrogen gas was sent in the direction of an arrow (14a). Its flow rate was measured by a flowmeter (5d) and an automatic control was carried out depending upon the measured result in sending the liquid to a plate sterilizer (17) to preheat. After that, it was homogenized in a homogenizer (20), sent to a plate sterilizer (17) again to sterilize and sent to a filling step (not shown) by a liquid-sending pipe to fill whereupon a product was prepared.

Advantage of the Invention

[0064] In accordance with the present invention, even when a sterilizing treatment is carried out at the sterilizing temperature of 130°C for 2 seconds, amount of the sulfides generated thereby is suppressed to the same degree as the sterilization is carried out at 10-15°C lower than the actual sterilizing temperature. Accordingly, the sterilization which is necessary and sufficient for a long-term storage can be carried out and, in addition, generation of the sulfides can be made small whereby there is an advantage of improving the taste. Moreover, it is possible to produce beverage such as milk at a low cost without apparatus in a large size.

Claims

1. In a method for sterilization where dissolved oxygen in milk or the like is substituted with nitrogen gas, a method for sterilization where dissolved oxygen in milk or the like is substituted with nitrogen gas which is characterized in that

- (1) a means in which nitrogen gas is directly mixed with and dispersed in milk or the like and
 (2) a means in which milk or the like with which nitrogen gas is not mixed is sprayed from at least one nozzle to the top of milk or the like with and in which nitrogen gas has been mixed and dispersed by the means in the above (1), stored in a nitrogen gas substituting tank under a nitrogen gas atmosphere
 5 are jointly used whereby the dissolved oxygen amount in the milk or the like is reduced by means of substitution of the dissolved oxygen with nitrogen gas, followed by subjecting to sterilization.
2. The method for sterilization where the dissolved oxygen in milk or the like is substituted with nitrogen gas according to claim 1, wherein the sterilization is carried out by making the dissolved oxygen amount in milk or the like 2 ppm or less.
 10
3. The method for sterilization where the dissolved oxygen in milk or the like is substituted with nitrogen gas according to claim 1, wherein the means for mixing and dispersing of the nitrogen gas is a static mixer.
- 15 4. A product of milk or the like which is manufactured by a sterilizing method mentioned in any of claims 1 to 3.
5. In an apparatus for substituting the dissolved oxygen in milk or the like with nitrogen gas, a substituting apparatus for milk or the like with nitrogen gas which is characterized in that a nitrogen gas substituting tank connected to a material tank by a liquid-sending pipe is installed, a nitrogen gas supplying device is connected to the said liquid-sending pipe at the side of the material tank while a nitrogen gas mixing/dispersing device is installed at the side of the above nitrogen gas substituting tank, another end of the branched liquid-sending pipe connected to the upstream side from the nitrogen gas-supplying device of the liquid-sending pipe is introduced into a nitrogen gas-substituting tank, a spraying nozzle is connected to the said part and each of the above liquid-sending pipes, nitrogen gas supplying device and a connecting branched pipe is equipped with a flow rate controlling device.
 20
 25
6. The substituting apparatus for milk or the like with nitrogen gas according to claim 5, wherein the mixing/dispersing device for the nitrogen gas is a static mixer.
7. The substituting apparatus for milk or the like with nitrogen gas according to claim 5, wherein the flow rate controlling device is a flow rate controlling valve.
 30

35

40

45

50

55

FIG. 1

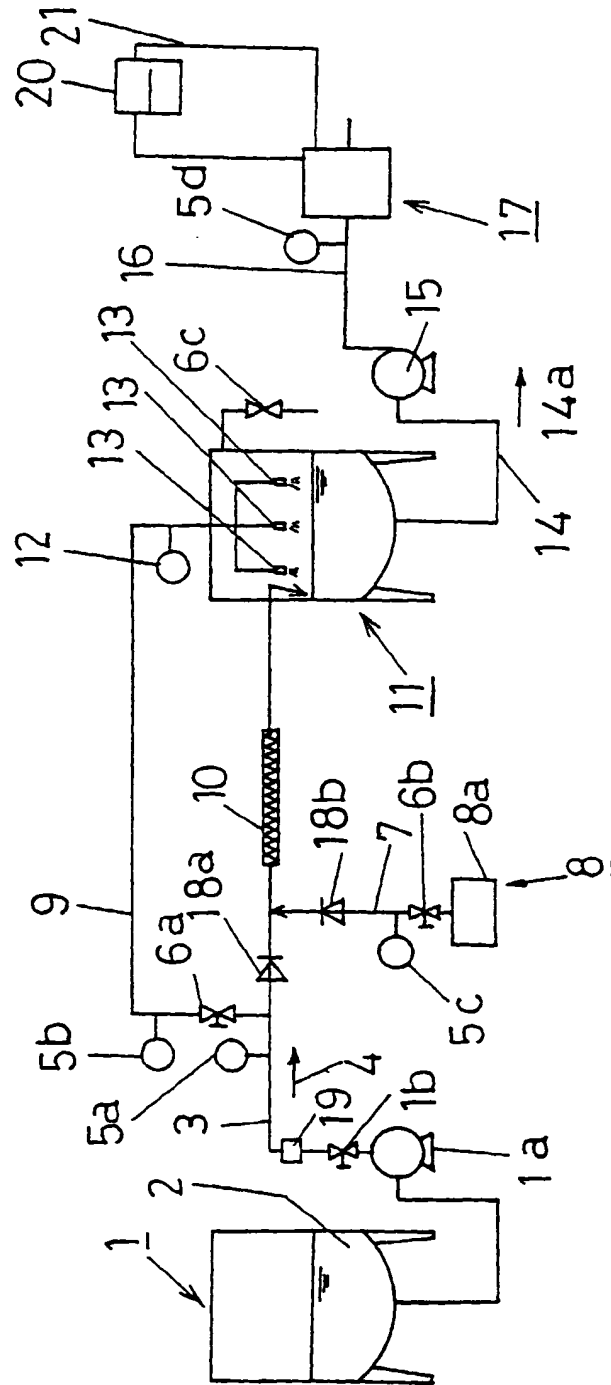


FIG. 2

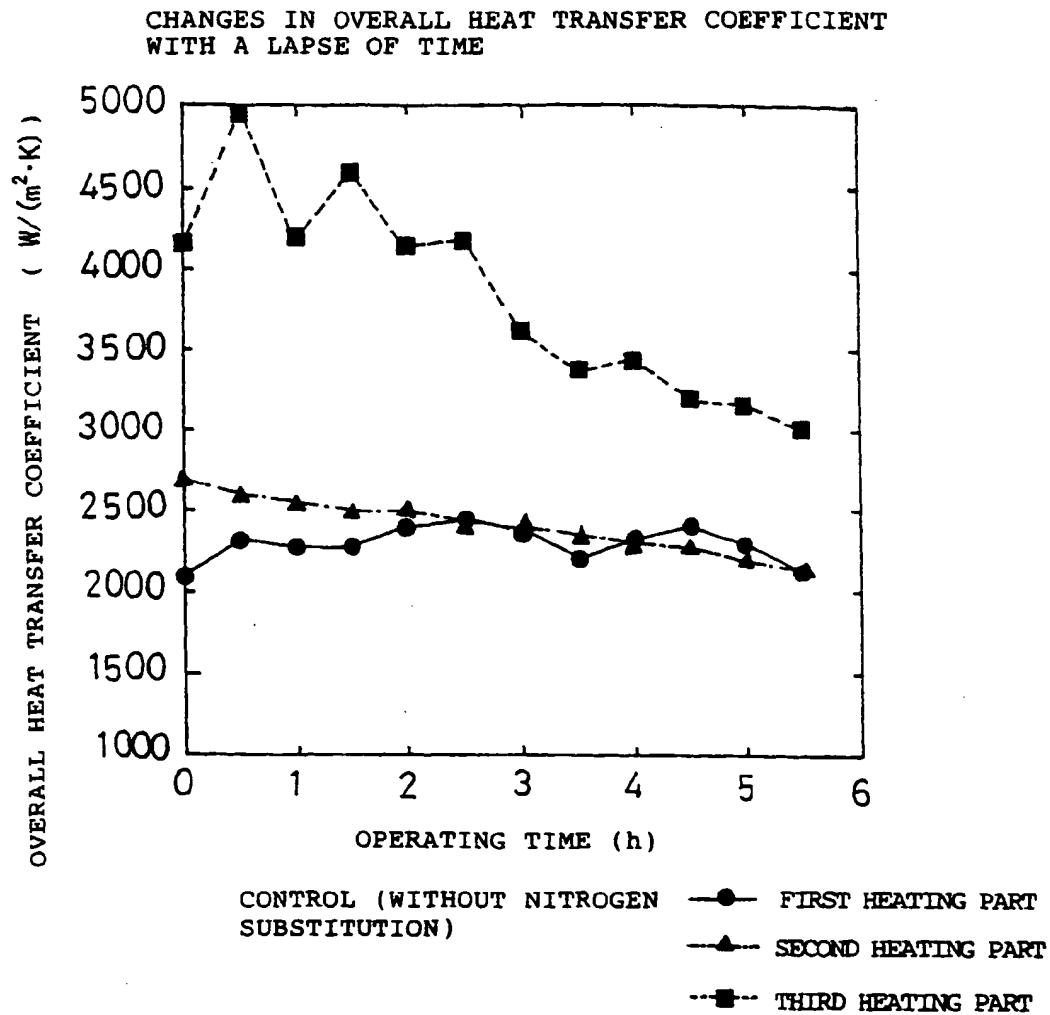


FIG. 3


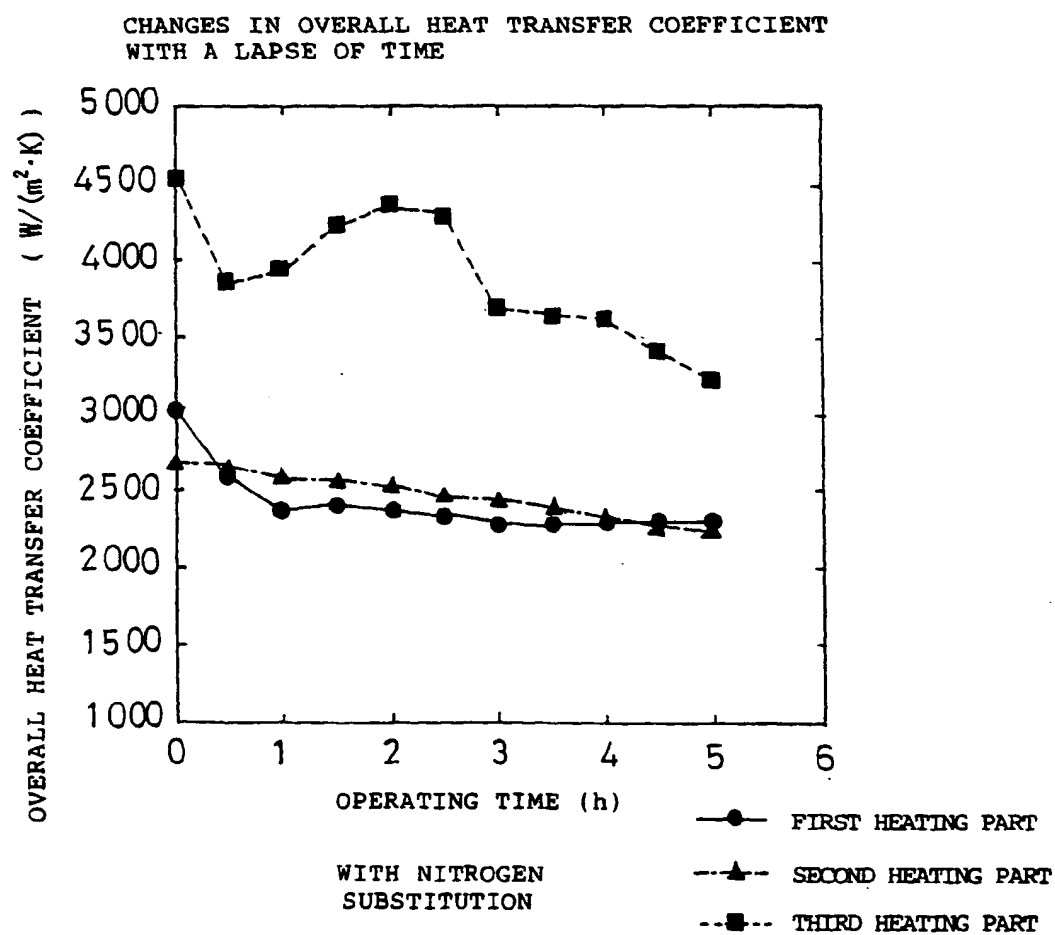


FIG. 4



(19)

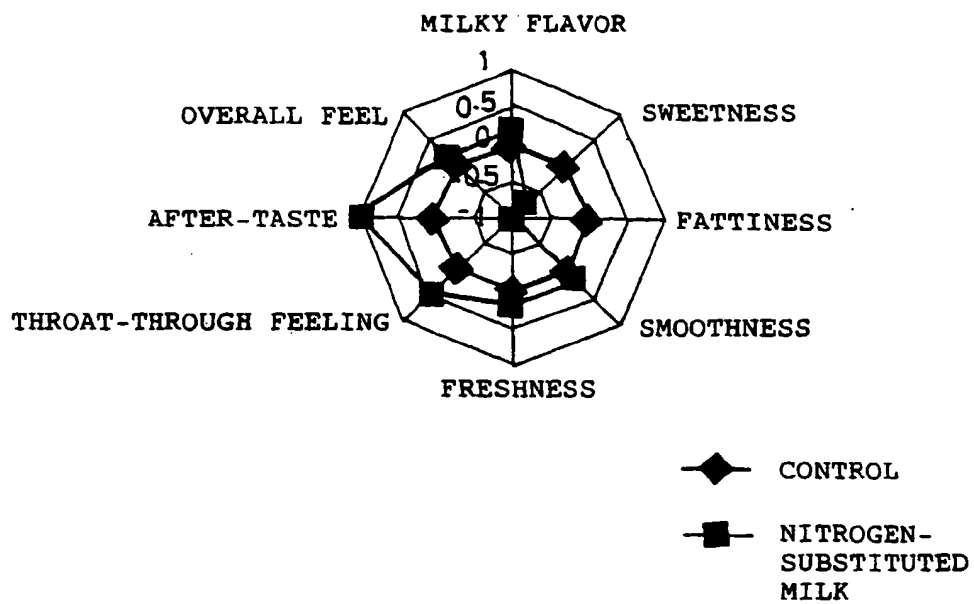

Europäisches Patentamt
European Patent Office
Office européen des brevets



(11)

EP 1 082 907 A3

(12)

EUROPEAN PATENT APPLICATION

(88) Date of publication A3:
17.04.2002 Bulletin 2002/16

(51) Int Cl.7: **A23C 3/033**, A23C 9/152,
A23L 3/3409, A23L 3/18

(43) Date of publication A2:
14.03.2001 Bulletin 2001/11

(21) Application number: **00118250.0**

(22) Date of filing: **04.09.2000**

(84) Designated Contracting States:
**AT BE CH CY DE DK ES FI FR GB GR IE IT LI LU
MC NL PT SE**
Designated Extension States:
AL LT LV MK RO SI

(30) Priority: **09.09.1999 JP 25630099**

(71) Applicant: **Meiji Dairies Corporation**
Koto-ku, Tokyo (JP)

(72) Inventors:
• **Kamiya, Tetsu,**
Meiji Milk Products Company Ltd.
Isesaki-shi, Gunma-ken 372-0034 (JP)

• **Toyoda, Ikuru**
Higashimurayama-shi, Tokyo, 189-0002 (JP)
• **Inagaki, Hiroki**
Higashimurayama-shi, Tokyo, 189-0003 (JP)
• **Takeuchi, Yukinari**
Higashimurayama-shi, Tokyo, 189-0014 (JP)
• **Kudo, Shunichi**
Iruma-shi, Saitame-ken, 358-0027 (JP)

(74) Representative:
Gille Hrabal Struck Neidlein Prop Roos
Patentanwälte
Brucknerstrasse 20
40593 Düsseldorf (DE)

(54) **A sterilising method by substituting the dissolved oxygen in milk or the like with nitrogen gas, a product thereof and an apparatus for nitrogen gas substitution**

(57) An object of the present invention is to reduce the generation of smell by sterilization and to improve the taste in carrying out the sterilization of milk or the like. Sterilization is carried out after the dissolved oxygen in milk or the like is substituted with nitrogen gas, and the method is characterized in that a means in which nitrogen gas is directly mixed with and dispersed in milk or the like and a means in which milk or the like with

which nitrogen gas is not mixed is sprayed from a nozzle (s) to the top of milk or the like, with and in which nitrogen gas has been mixed and dispersed, stored in a nitrogen gas substituting tank under a nitrogen gas atmosphere, are jointly used whereby the dissolved oxygen amount in the milk or the like is reduced by means of substitution of the dissolved oxygen with nitrogen gas.

EP 1 082 907 A3



European Patent
Office

EUROPEAN SEARCH REPORT

Application Number
EP 00 11 8250

DOCUMENTS CONSIDERED TO BE RELEVANT						
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (Int.Cl.7)			
X	US 3 113 871 A (WEBSTER ROBERT C) 10 December 1963 (1963-12-10)	4	A23C3/033			
A	* the whole document *	1-3,5-7	A23C9/152			
	---		A23L3/3409			
X	US 4 935 255 A (ANDERSON DELMAR L ET AL) 19 June 1990 (1990-06-19)	4	A23L3/18			
A	* column 3, line 52 - column 5, line 14; claims 1,2,6,8 *	1-3,5-7				

X	US 5 585 128 A (BENEDICT LEWIS W ET AL) 17 December 1996 (1996-12-17)	4				
A	* column 5, paragraph 3; example 4 *	1-3,5-7				

X,D	PATENT ABSTRACTS OF JAPAN vol. 1999, no. 02, 26 February 1999 (1999-02-26) & JP 10 295341 A (MEIJI MILK PROD CO LTD), 10 November 1998 (1998-11-10)	4				
A	* abstract *	1-3				

X	DE 197 36 643 A (LINDE AG) 25 February 1999 (1999-02-25)	4				
	* the whole document *					

The present search report has been drawn up for all claims			TECHNICAL FIELDS SEARCHED (Int.Cl.7)			
			A23C			
			A23L			
<table border="1"> <tr> <td>Place of search THE HAGUE</td> <td>Date of completion of the search 5 February 2002</td> <td>Examiner Koch, J</td> </tr> </table>				Place of search THE HAGUE	Date of completion of the search 5 February 2002	Examiner Koch, J
Place of search THE HAGUE	Date of completion of the search 5 February 2002	Examiner Koch, J				
<table border="1"> <tr> <td> CATEGORY OF CITED DOCUMENTS X : particularly relevant if taken alone Y : particularly relevant if combined with another document of the same category A : technological background O : non-written disclosure P : intermediate document </td> <td> T : theory or principle underlying the invention E : earlier patent document, but published on, or after the filing date D : document cited in the application L : document cited for other reasons & : member of the same patent family, corresponding document </td> </tr> </table>				CATEGORY OF CITED DOCUMENTS X : particularly relevant if taken alone Y : particularly relevant if combined with another document of the same category A : technological background O : non-written disclosure P : intermediate document	T : theory or principle underlying the invention E : earlier patent document, but published on, or after the filing date D : document cited in the application L : document cited for other reasons & : member of the same patent family, corresponding document	
CATEGORY OF CITED DOCUMENTS X : particularly relevant if taken alone Y : particularly relevant if combined with another document of the same category A : technological background O : non-written disclosure P : intermediate document	T : theory or principle underlying the invention E : earlier patent document, but published on, or after the filing date D : document cited in the application L : document cited for other reasons & : member of the same patent family, corresponding document					

EPO FORM 1503 03 82 (p0401)

**ANNEX TO THE EUROPEAN SEARCH REPORT
ON EUROPEAN PATENT APPLICATION NO.**

EP 00 11 8250

This annex lists the patent family members relating to the patent documents cited in the above-mentioned European search report. The members are as contained in the European Patent Office EDP file on
The European Patent Office is in no way liable for these particulars which are merely given for the purpose of information.

05-02-2002

Patent document cited in search report		Publication date	Patent family member(s)		Publication date
US 3113871	A	10-12-1963	NONE		
US 4935255	A	19-06-1990	CA	1306141 A1	11-08-1992
US 5585128	A	17-12-1996	AU	703885 B2	01-04-1999
			AU	6385096 A	30-12-1996
			WO	9639874 A1	19-12-1996
			ZA	9604721 A	12-03-1997
JP 10295341	A	10-11-1998	JP	3083798 B2	04-09-2000
DE 19736643	A	25-02-1999	DE	19736643 A1	25-02-1999

EPC FORM P0462

For more details about this annex : see Official Journal of the European Patent Office, No. 12/82